

Aluforce Pro 250 M

Dual step, stand-sit height electrically adjustable

Height (mm)	min. 630 / max. 1280
Stroke (mm)	650
Speed (mm/s)	42
Width (mm)	min. 1100 / max. 1700
Depth of feet (mm)	660
Capacity (kg)	dynamic 80 / static 140
Noise dB(A)	<50
Power	V 110, V 240 / standby (W) 0,5
Plug type	Replaceable
Weight (kg)	30

Legs and feet made of powder coated aluminium.
Top supports & crossbars made of powder coated steel.

Surface color

Black	●
White	○
Silver	●

Packing dimension single unit

1110 x 280 x 180 (LxWxH - mm)

Packing dimension pallet (24 frames)

1140 x 1120 x 1200 (LxWxH - mm)


Accessories

For further information see the accessories section of this catalogue.



VISIONLIFT
INSIDE

**Actiforce
express**
Available from stock
visit actiforce.com/express

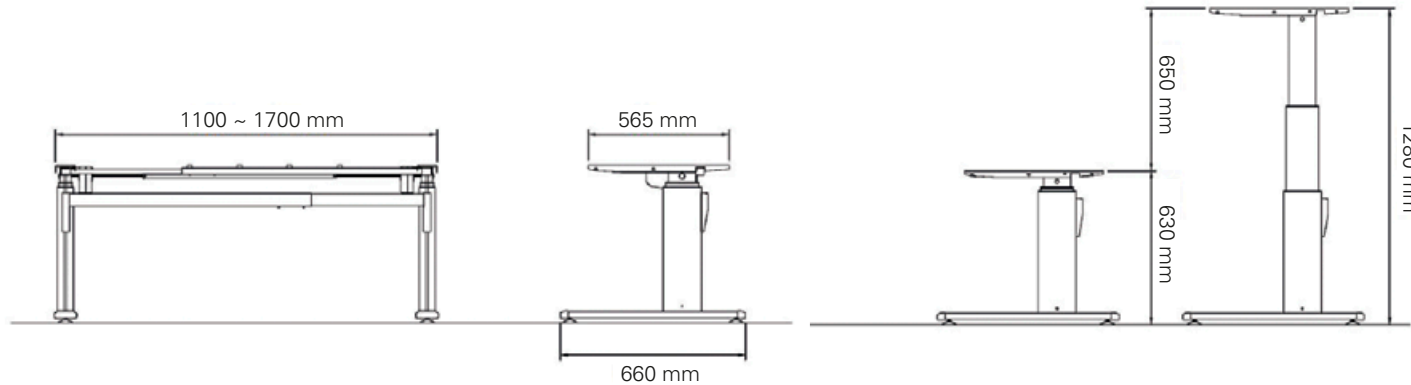

actiforce