

# Aluforce Pro 250 M

## Dual step, sit-stand height electrically adjustable

Height (mm)	min. 630 / max. 1280
Stroke (mm)	650
Speed (mm/s)	31
Width (mm)	min. 1100 / max. 1700
Length of feet (mm)	740
Dynamic capacity (kg)	80
Noise dB(A)	<50
Power	V 240 / standby (W) 0,5
Plug type	Replaceable
Gross Weight (kg)	30

Legs and feet made of powder-coated aluminium.  
Top supports and crossbars made of powder-coated steel.

## Surface colour

Silver ●

## Purchase code

P230T300830102EU-SG

## Packing dimension single unit

1120 x 280 x 180 (LxWxH - mm)

## Packing dimension pallet (24 frames)

1140 x 1120 x 1200 (LxWxH - mm)

## Accessories


Please see the accessories section to personalise your height adjustable frame.



VISIONLIFT  
INSIDE



Tested according to  
ANSI/BIFMA X5.5 by TÜV SÜD.

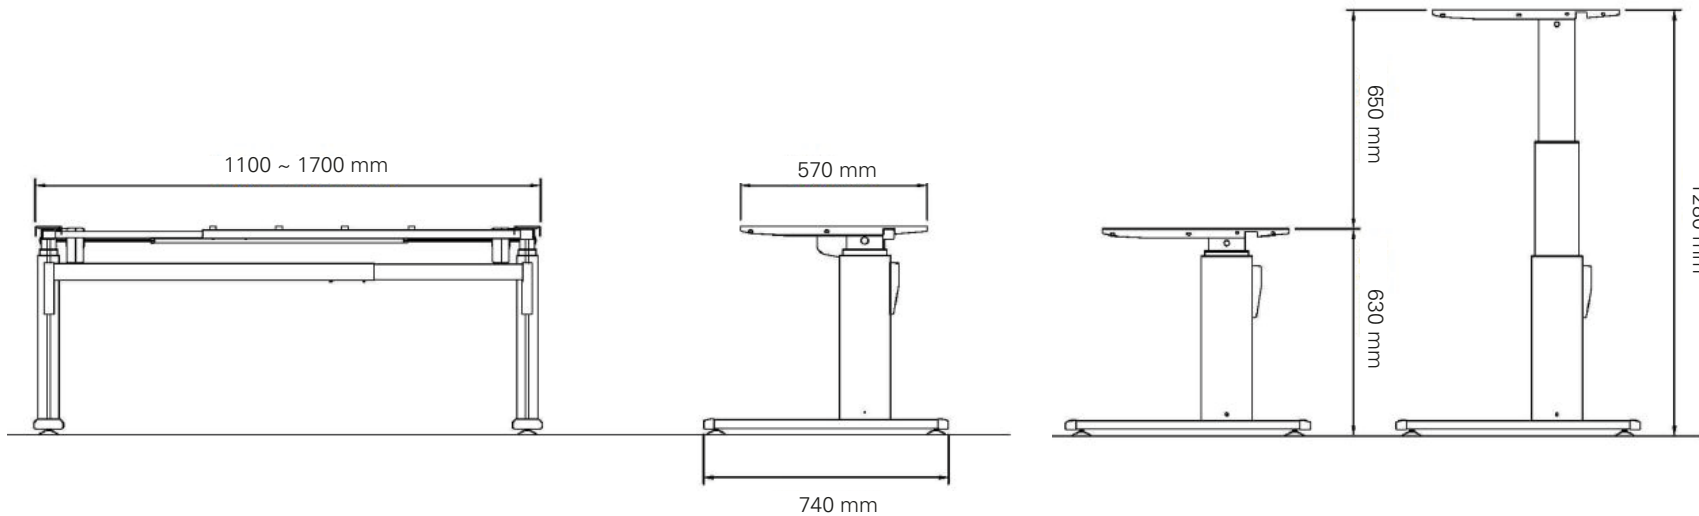

actiforce