

# Steelforce Pro 675 SLS Conference + XL

## Dual step, sit-stand, height electrically adjustable

|                             |                       |
|-----------------------------|-----------------------|
| Height (mm)                 | min. 615 / max. 1275  |
| Stroke (mm)                 | 660                   |
| Speed (mm/s)                | 39                    |
| Width Standard version (mm) | min. 2100 / max. 2400 |
| Width XL version (mm)       | min. 2500 / max. 3000 |
| Length of feet              | 1x 750 mm / 2x 600 mm |
| Column size (mm)            | 60 x 90               |
| Dynamic capacity (kg)       | 150                   |
| Noise dB(A)                 | <55                   |
| Power                       | V 220 - 240           |
| Plug type                   | Replaceable           |
| Weight (kg)                 | 48                    |

Legs, feet, top supports and crossbars made of powder-coated steel.  
Soft start & stop function.  
Spindle lifting system and low energy consumption.

## Surface colour Standard version

| Surface colour |   | Purchase code      |
|----------------|---|--------------------|
| Pure Silver    | ● | SLS37E05016483EU-0 |
| Traffic White  | ○ | SLS37E05016429EU-0 |
| Jet Black      | ● | SLS37E05016490EU-0 |

## Surface colour XL-version

| Surface colour |   | Purchase code      |
|----------------|---|--------------------|
| Pure Silver    | ● | SLS37H05017483EU-0 |
| Traffic White  | ○ | SLS37H05017429EU-0 |
| Jet Black      | ● | SLS37H05017490EU-0 |

## Packing dimension single unit

Box 1 .945 x 275 x 168 (LxWxH - mm)

Box 2 .945 x 275 x 168 (LxWxH - mm)

## Packing dimension pallet (12 frames)




1140 x 1130 x 1210 (LxWxH - mm)

## Accessories

Please see the accessories section to personalise your height adjustable frame.



Tested according to IEC 60335-1 by Intertek.

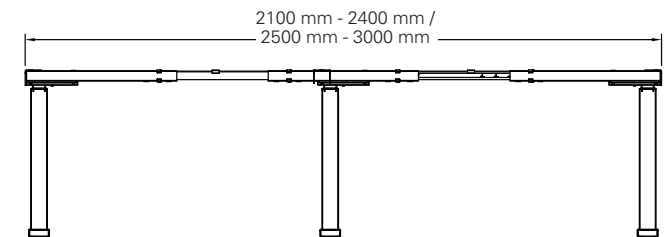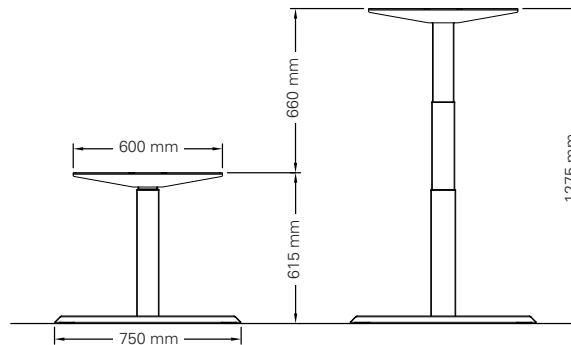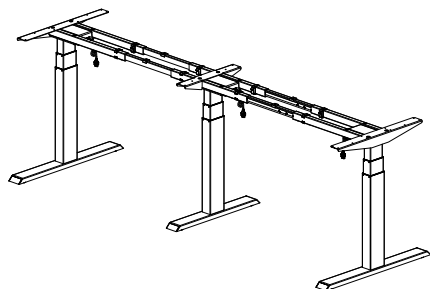

actiforce