

SLS 67X PRO DEGREE KIT

Dual step, sit-stand electrically height adjustable

Height (mm)	min. 615 / max. 1275
Stroke (mm)	660
Speed (mm/s)	30 / 40 / 60 adjustable
Width (mm)	Details below
Length of feet	2x 750 mm / 1x 600 mm
Column size (mm)	60 x 90
Dynamic capacity (kg)	150
Noise dB(A)	<55
Power	V 100 - 240
Plug type	Replaceable
Gross Weight (kg)	53,9
Handswitch	ActiSwitch Eco-Memory
Anti-Collision	Gyro Sense

Legs, feet, top supports & crossbar made of powder coated steel.
Softstart & -stop function & Spindle lifting system.

Surface color Purchase code

Silver	●	10000452
White	○	10000495
Black	●	10000497

Packing dimension single unit

Box 1. 945 x 275 x 200 (LxWxH - mm)
Box 2. 945 x 275 x 200 (LxVxH - mm)

Packing dimension pallet (12 frames)


1140 x 1130 x 1610 (LxWxH - mm)

Accessories


Please see our accessories section to personalise your frame.




Tested according to IEC 60335-1 by Intertek.

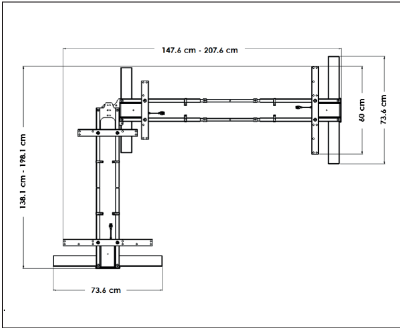


90° Width Main (mm):	1.476 - 2.076
90° Width Ancillary (mm):	1.381 - 1.981

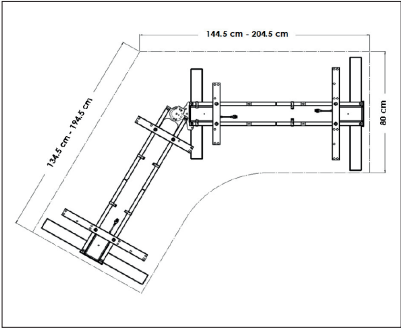

120° Width Main (mm):	1.445 - 2.045
120° Width Ancillary (mm):	1.345 - 1.945

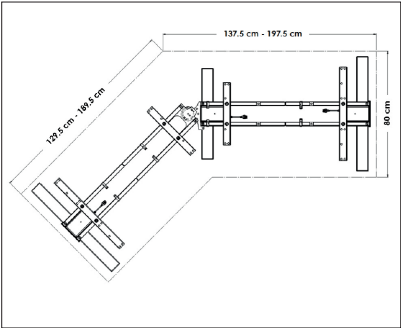

135° Width Main (mm):	1.375 - 1.975
135° Width Ancillary (mm):	1.295 - 1.895

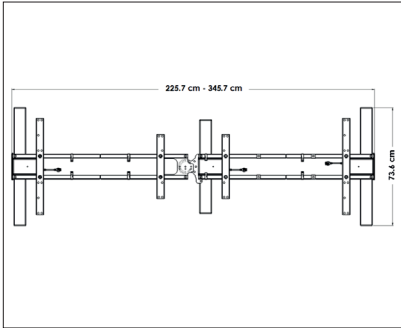

180° Width (mm):	2.257 - 3.457
------------------	---------------

